MiBOXER® | Mi·Light Subordinate New Brand

8-Channel 2 Wires 2 in 1 LED Controller (WiFi+2.4G)

Model: LC4-WR

Features




- DuPont quick connectors for connecting up to 8 LED strips
- Color temperature, brightness dimmable
- Biological rhythm and music rhythm
- 4096 level smooth dimming, mini brightness 0.1%, dimming range 0.1%-100%
- One controller support max 12pcs remote (control distance 30m)
- Auto transmitting: transmit signal to another one automatically and expand unlimited control distance
- Support DND mode and usually used for power failure area to save power
- Support "TUYA SMART" APP control
- Support Alexa, Google Assistant, Yandex Alice


Parameters

Product Name:	8-Channel 2 Wires 2 in 1 LED Controller
Model No.:	LC4-WR
Input Voltage:	DC12~24V
Output Current:	2A/ Channel, Max 6A
Output Type:	Constant Voltage
Protocol:	WiFi+2.4GHz RF
Control Distance:	RF: 30M
IP Rate:	IP20


Working Temp.:	-10~40℃
EMC Standard (EMC):	ETSI EN 301 489-1 V2.2.3 ETSI EN 301 489-3 V2.1.1
Safety Standard (LVD):	EN 61347-2-11: 2001+A1: 2019 EN 61347-1: 2015+A1:2021 EN 62493: 2015+A1:2022
Radio Equipment (RED):	ETSI EN 300 440 V2.2.1
Certification:	CE, EMC, LVD, RED

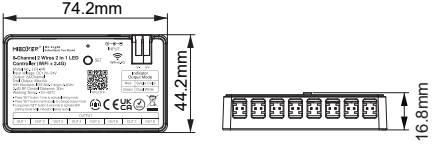

Connection Diagram

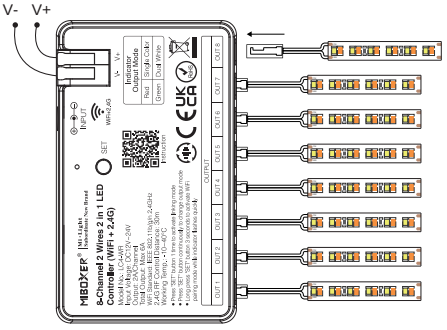

Application Diagram

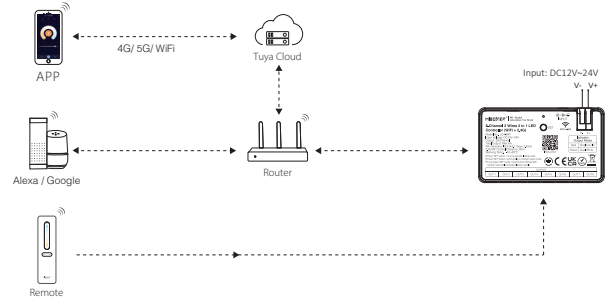


Set up output mode

Set up correct output mode based on the feature of lights
Setting method: Press "SET" button continuously to switch output mode (attention: it will log out without operation within 3 seconds)

Output mode sheet (confirm output mode based on color of indicator)


Indicator color	Red Light	Green Light
Output	Single Color Mode	2 Wires Dual White Mode

Compatible with these 2.4G RF remote controls (Purchased separately)

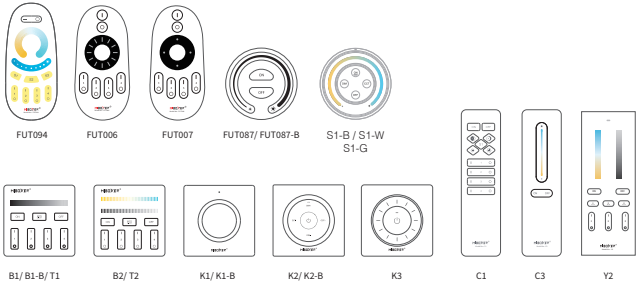


2.4G RF Remote control instruction

Linking Code Instructions



Power off 10 seconds and power on again or short press " SET " one time




Short press " ON " button 3 times within 3 seconds.




Lights blink 3 times slowly means linking is done successfully.

Linking failed if light is not blinking slowly, Please follow above steps again.
(Note: Light that have linked can't link again)

Unlinking Code Instructions



Power off 10 seconds and power on again or short press " SET " one time



Short press " ON " button 5 times within 3 seconds.




Lights blink 10 times quickly means unlinking is done successfully.

Unlinking failed if light is not blinking quickly, Please follow above steps again.
(Note: Light haven't linked that don't need to unlink)

Transmitting function instruction

One Controller can transmit the signals from the remote control to another Controller within 30m, as long as there is a LED Driver within 30m, the remote control distance can be limitless.

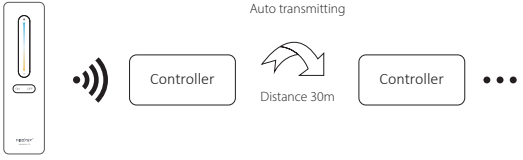

Attention: All "LED Driver" must be linked with one remote.

Turn Do Not Disturb mode on and off (ON by default)

Turn on "Do Not Disturb" (applicable to areas with frequent power outages to save energy)

Turn on Do Not Disturb mode:

Short press the "OFF" button 3 times within 3 seconds, and then short press the "ON" button 3 times. The light flashes 4 times to indicate success.

Note: When the lamp is powered on again after a power outage, its status (lights on or off) will remain the same as before the power outage.

Turn off Do Not Disturb mode:

Short press the "ON" button 3 times within 3 seconds, and then short press the "OFF" button 3 times. The light flashes 4 times slowly to indicate successful shutdown.

Note: When the lamp is powered on again after a power outage, its status will be on by default.

Smartphone app control instruction

Network Configuration (Don't support 5G router)

1). Download and install [Tuya Smart] app

Search for [Tuya Smart] in Apple or Google store or scan following QR code to download and install the app.

Please open the app click " Register " button to create account while using it in the first time, Log in directly if you already had account.

2). Network Configuration

(1) Connect controller with power supply.

(2) Confirm indicator light is flashing quickly (2 flashes per second),
If indicator light isn't in fast flashing state, there are two ways to enter:


- Long press " LINK " key until indicator light flashing quickly.
- Power off and on controller 6 times.


(3) Connect phone with home WiFi network in the 2.4GHz frequency.

(4) Open homepage of app and click " + " button at the upper right corner of page.

(5) Click " Lighting " on the left side of page and then click " Light Source (BLE+Wi-Fi) "


(6) Follow app prompts to complete configuration.







App turn on and off “Do Not Disturb” mode (default activated)

Click the light which need to be set up or group control --- click “More”--- click “Power-on behavior”--- turn on or off

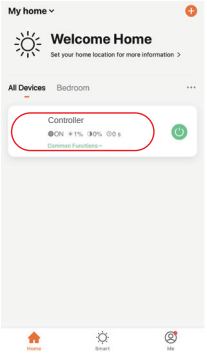

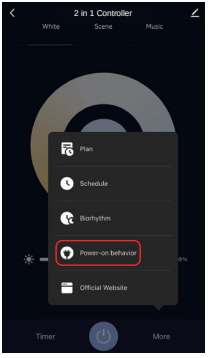


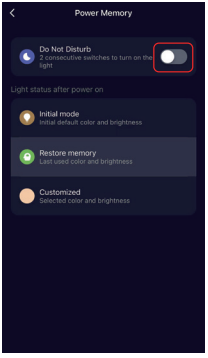


Alexa voice control instruction

Please add device into **[Tuya Smart]** app, then start following steps


1). Open Alexa App
2). Click “More” on the bottom of right corner
3). Click “Skills & Games”



4). Click “ ” on the top of right corner
5). Type into “Smart life” and search




6). Click “Smart Life” skill, follow instruction to finish configuration and start voice control




Google Home voice control instruction

Please add device into **[Tuya Smart]** app, then start following steps


1). Open Google Home App
2). Click “+” on the top of left corner




3). Click “Set up device”



4). Click “Works with Google”



5). Click “ ” on the top of right corner
6). Type into “Smart life” and search
7). Click “Smart Life” skill, follow instruction to finish configuration and start voice control



Attention

1. Please turn off power supply before installation.
2. Please ensure input voltage to be same as requirements from device.
3. Don’t disassemble device if you are not expert, otherwise it will damage it.
4. Please do not use the light in the place with widely range metal area or strong electromagnetic wave nearby, otherwise, the remote distance will be seriously affected.

Made in China