




fame

K51500.03.TK.WH-WH.38.ST.8.40

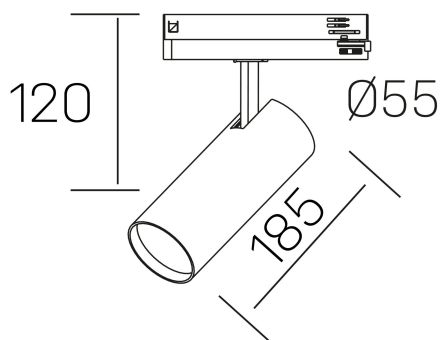

GENERAL DETAILS

INSTALLATION	Tracklight
COLOR EXT-INT	White-White
LIGHT DIRECTION	Orientable
BEAM ANGLE	38°
INT/EXT IP DEGREE	IP20
MATERIAL	Aluminio
TILTING DEGREES	90°
IK DEGREE	IK02
UTILIZATION	Indoor
WARRANTY	3 años
ROTATION DEGREES	360°

ELECTRICAL DETAILS

LAMP	LED
POWER	30 W
COLOUR TEMPERATURE	4000K
ANALYSIS LUMINAIRE LUMINOUS FLU	2670 Lm
ANALYSIS EFFICIENCY	92 Lm/W
DIMABLE	No Dim
DRIVER	Integrado
ELECTRICAL INSULATION CLASS	II
COLOUR RENDERING INDEX	CRI >80
VOLTAGE	220-240 V
FRECUENCIA	50-60 Hz
CURRENT INTENSITY	700 mA
LIFE TIME	35.000 h

GENERAL DIMENSIONS

DIMENSION	185 x Ø 75 mm
HEIGHT	h 95 mm, h 120 mm
DIMENSIONES DE EMBALAJE	205 × 225 × 95 mm
PESO NETO	0.38

*Please might expect a max.15% figure reduction in finishes other than white