




nse
K51300.03.TR.BK-BK.30.ST.9.27

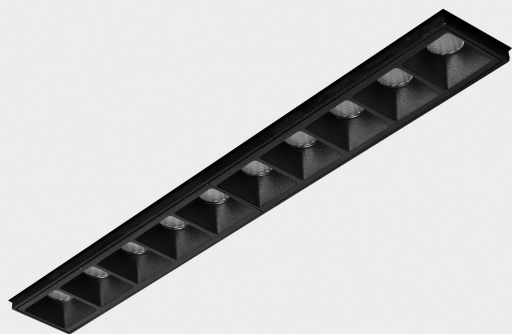

GENERAL DETAILS

INSTALLATION	Trimless
COLOR EXT-INT	Black-Black
LIGHT DIRECTION	Fixed
BEAM ANGLE	30°
INT/EXT IP DEGREE	IP20
MATERIAL	Aluminio
IK DEGREE	IK 6
UTILIZATION	Indoor
WARRANTY	3 años

ELECTRICAL DETAILS

LAMP	LED
POWER	20 W
COLOUR TEMPERATURE	4000K
ANALYSIS LUMINAIRE LUMINOUS FLU	1250 Lm
ANALYSIS EFFICIENCY	63 Lm/W
DIMABLE	No Dim
DRIVER	Remoto
ELECTRICAL INSULATION CLASS	II
COLOUR RENDERING INDEX	CRI>90
VOLTAGE	220-240 V
FRECUENCIA	50-60 Hz
CURRENT INTENSITY	700 mA
LIFE TIME	35.000 h

GENERAL DIMENSIONS

DIMENSION	270×35 mm
CUT OUT	275×70 mm
HEIGHT	h 56.5 mm
ALTURA MIN DE FALSO TECHO	20 mm
DISTANCIA MIN FALSO TECHO	20 mm
DIMENSIONES DE EMBALAJE	325 × 80 × 85 mm
PESO NETO	0.86

*Please might expect a max.15% figure reduction in finishes other than white

