


chess k-select

K50510.03.RF.WH-WH.MP.ST.8.01

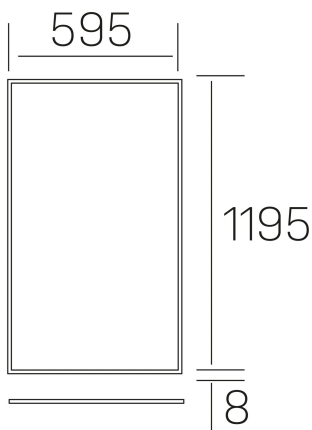

GENERAL DETAILS

INSTALLATION	recessed with frame
COLOR EXT-INT	White-White
OPTIC COVER	Microprismatico
LIGHT DIRECTION	Fixed
INT/EXT IP DEGREE	IP 23
MATERIAL	Aluminio
IK DEGREE	IK03
UTILIZATION	Indoor
WARRANTY	3 años

ELECTRICAL DETAILS

LAMP	LED
POWER	60 W
COLOUR TEMPERATURE	3CCT 3000K-4000K-6000K
ANALYSIS LUMINAIRE LUMINOUS FLU	4250-4950-4450 Lm
ANALYSIS EFFICIENCY	73-85-76 Lm/W
DIMABLE	No Dim
DRIVER	Remoto
ELECTRICAL INSULATION CLASS	II
COLOUR RENDERING INDEX	CRI >80
VOLTAGE	220-240 V
FRECUENCIA	50-60 Hz
CURRENT INTENSITY	1500 mA
LIFE TIME	35.000 h

GENERAL DIMENSIONS

DIMENSION	1195×595 mm
CUT OUT	1195×595 mm (techo modular)
HEIGHT	h 8 mm
DISTANCIA MIN FALSO TECHO	20 mm
DIMENSIONES DE EMBALAJE	N/A
PESO NETO	4.70

*Please might expect a max.15% figure reduction in finishes other than white