




lim
K50320.02.RF.BK-BK.MP.ST.8.40

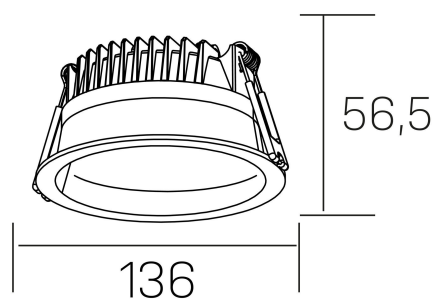

GENERAL DETAILS

INSTALLATION	recessed with frame
COLOR EXT-INT	Black-Black
OPTIC COVER	Microprismatico
LIGHT DIRECTION	Fixed
INT/EXT IP DEGREE	IP 44
MATERIAL	Aluminio
IK DEGREE	IK 6
UTILIZATION	Indoor
WARRANTY	3 años

ELECTRICAL DETAILS

LAMP	LED
POWER	12 W
COLOUR TEMPERATURE	4000K
ANALYSIS LUMINAIRE LUMINOUS FLU	1100 lm
ANALYSIS EFFICIENCY	91 Lm/W
DIMABLE	No Dim
DRIVER	Remoto
ELECTRICAL INSULATION CLASS	II
COLOUR RENDERING INDEX	CRI >80
VOLTAGE	220-240 V
FRECUENCIA	50-60 Hz
CURRENT INTENSITY	300 mA
LIFE TIME	35.000 h

GENERAL DIMENSIONS

DIMENSION	Ø 136 mm
CUT OUT	Ø 120 mm
HEIGHT	h 56,5 mm
DISTANCIA MIN FALSO TECHO	20 mm
DIMENSIONES DE EMBALAJE	145 × 145 × 70 mm
PESO NETO	0.36

*Please might expect a max.15% figure reduction in finishes other than white