




**nse**  
K51300.03.TR.BK-BK.15.ST.9.27

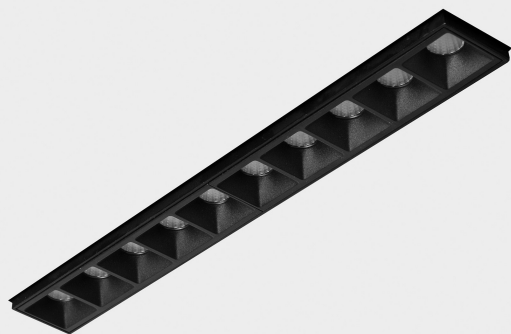

## GENERAL DETAILS

|                   |             |
|-------------------|-------------|
| INSTALLATION      | Trimless    |
| COLOR EXT-INT     | Black-Black |
| LIGHT DIRECTION   | Fixed       |
| BEAM ANGLE        | 15°         |
| INT/EXT IP DEGREE | IP20        |
| MATERIAL          | Aluminio    |
| IK DEGREE         | IK 6        |
| UTILIZATION       | Indoor      |
| WARRANTY          | 3 años      |

## ELECTRICAL DETAILS

|                                 |           |
|---------------------------------|-----------|
| LAMP                            | LED       |
| POWER                           | 20 W      |
| COLOUR TEMPERATURE              | 2700K     |
| ANALYSIS LUMINAIRE LUMINOUS FLU | 1250 Lm   |
| ANALYSIS EFFICIENCY             | 63 Lm/W   |
| DIMABLE                         | No Dim    |
| DRIVER                          | Remoto    |
| ELECTRICAL INSULATION CLASS     | II        |
| COLOUR RENDERING INDEX          | CRI>90    |
| VOLTAGE                         | 220-240 V |
| FRECUENCIA                      | 50-60 Hz  |
| CURRENT INTENSITY               | 700 mA    |
| LIFE TIME                       | 35.000 h  |

## GENERAL DIMENSIONS

|                           |                  |
|---------------------------|------------------|
| DIMENSION                 | 270×35 mm        |
| CUT OUT                   | 275×70 mm        |
| HEIGHT                    | h 56.5 mm        |
| ALTURA MIN DE FALSO TECHO | 20 mm            |
| DISTANCIA MIN FALSO TECHO | 20 mm            |
| DIMENSIONES DE EMBALAJE   | 325 × 80 × 85 mm |
| PESO NETO                 | 0.86             |

