




**nses**  
K51300.01.SR.BK-BK.15.ST.9.40

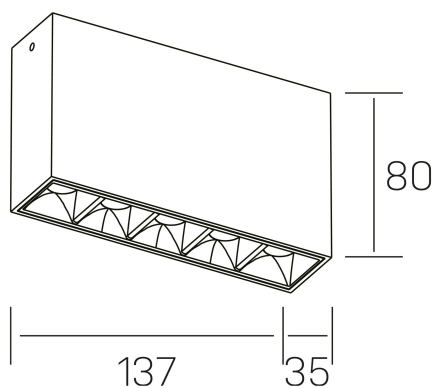

## GENERAL DETAILS

|                   |             |
|-------------------|-------------|
| INSTALLATION      | Surface     |
| COLOR EXT-INT     | Black-Black |
| LIGHT DIRECTION   | Fixed       |
| BEAM ANGLE        | 15°         |
| INT/EXT IP DEGREE | IP20        |
| MATERIAL          | Aluminio    |
| IK DEGREE         | IK 6        |
| UTILIZATION       | Indoor      |
| WARRANTY          | 3 años      |

## ELECTRICAL DETAILS

|                                 |           |
|---------------------------------|-----------|
| LAMP                            | LED       |
| POWER                           | 10W       |
| COLOUR TEMPERATURE              | 4000K     |
| ANALYSIS LUMINAIRE LUMINOUS FLU | 660 Lm    |
| ANALYSIS EFFICIENCY             | 57 Lm/W   |
| DIMABLE                         | No Dim    |
| DRIVER                          | Integrado |
| ELECTRICAL INSULATION CLASS     | II        |
| COLOUR RENDERING INDEX          | CRI>90    |
| VOLTAGE                         | 220-240 V |
| FRECUENCIA                      | 50-60 Hz  |
| CURRENT INTENSITY               | 700 mA    |
| LIFE TIME                       | 35.000h   |

## GENERAL DIMENSIONS

|                         |                   |
|-------------------------|-------------------|
| DIMENSION               | 137x35 mm         |
| HEIGHT                  | h 80 mm           |
| DIMENSIONES DE EMBALAJE | 160 x 150 x 45 mm |

\*Please might expect a max.15% figure reduction in finishes other than white