




sign
K50702.01.WR.BK-BK.ST.8.30

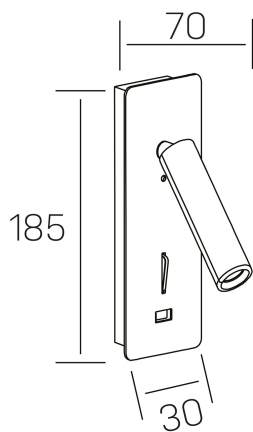

GENERAL DETAILS

INSTALLATION	Wall Recessed
COLOR EXT-INT	Black-Black
LIGHT DIRECTION	Orientable
INT/EXT IP DEGREE	IP20
MATERIAL	Aluminio
TILTING DEGREES	90°
IK DEGREE	IK010
UTILIZATION	Indoor
WARRANTY	3 años
ROTATION DEGREES	360°

ELECTRICAL DETAILS

LAMP	LED
POWER	3 W
COLOUR TEMPERATURE	3000K
ANALYSIS LUMINAIRE LUMINOUS FLU	160 Lm
ANALYSIS EFFICIENCY	49 Lm/W
DIMABLE	No Dim
DRIVER	Integrado
ELECTRICAL INSULATION CLASS	I
COLOUR RENDERING INDEX	CRI >80
VOLTAGE	220-240 V
FRECUENCIA	50-60 Hz
CURRENT INTENSITY	700 mA
LIFE TIME	35.000 h

GENERAL DIMENSIONS

DIMENSION	70 X 30 mm
CUT OUT	56X175 mm
HEIGHT	h 185mm
DIMENSIONES DE EMBALAJE	80 × 80 × 200 mm
PESO NETO	0.56

*Please might expect a max.15% figure reduction in finishes other than white