




bot
K50701.01.WS.WH-WH.ST.8.30

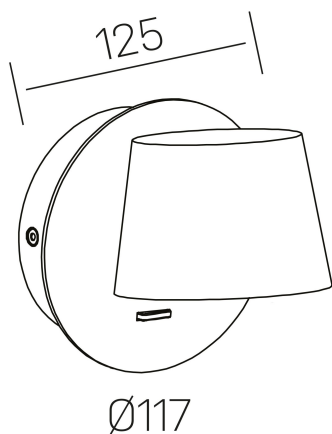

GENERAL DETAILS

INSTALLATION	Wall Surface
COLOR EXT-INT	White-White
LIGHT DIRECTION	Orientable
INT/EXT IP DEGREE	IP20
MATERIAL	Aluminio
TILTING DEGREES	90°
IK DEGREE	IK010
UTILIZATION	Indoor
WARRANTY	3 años
ROTATION DEGREES	360°

ELECTRICAL DETAILS

LAMP	LED
POWER	6 W
COLOUR TEMPERATURE	3000K
ANALYSIS LUMINAIRE LUMINOUS FLU	300 Lm
ANALYSIS EFFICIENCY	47 Lm/W
DIMABLE	No Dim
DRIVER	Integrado
ELECTRICAL INSULATION CLASS I	
COLOUR RENDERING INDEX	CRI >80
VOLTAGE	220-240 V
FRECUENCIA	50-60 Hz
CURRENT INTENSITY	300 mA
LIFE TIME	35.000 h

GENERAL DIMENSIONS

DIMENSION	Ø 117×125 mm
HEIGHT	h 117 mm
DIMENSIONES DE EMBALAJE	135 × 135 × 120 mm
PESO NETO	5.3

*Please might expect a max.15% figure reduction in finishes other than white