




disc
K51702.06.RF.BK-BK.OP.ST.8.30

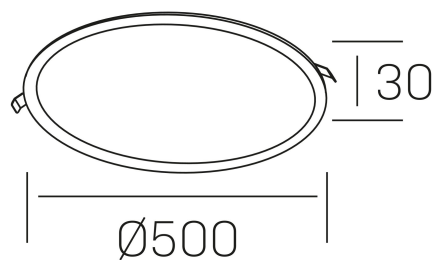

GENERAL DETAILS

INSTALLATION	recessed with frame, recessed with frame
COLOR EXT-INT	Black-Black
LIGHT DIRECTION	Fixed
INT/EXT IP DEGREE	IP 43
MATERIAL	Aluminio
IK DEGREE	IK03
UTILIZATION	Indoor
WARRANTY	3 años

ELECTRICAL DETAILS

LAMP	LED
POWER	48 W
COLOUR TEMPERATURE	3000K
ANALYSIS LUMINAIRE LUMINOUS FLU	4100 Lm
ANALYSIS EFFICIENCY	88 Lm/W
DIMABLE	No Dim
DRIVER	Remoto
ELECTRICAL INSULATION CLASS	II
COLOUR RENDERING INDEX	CRI >80
VOLTAGE	220-240 V
FRECUENCIA	50-60 Hz
CURRENT INTENSITY	1200 mA
LIFE TIME	35.000 h

GENERAL DIMENSIONS

DIMENSION	Ø 500 mm
CUT OUT	Ø 480 mm
HEIGHT	h 30mm
DISTANCIA MIN FALSO TECHO	20 mm
DIMENSIONES DE EMBALAJE	540 × 510 × 45 mm
PESO NETO	1.86

*Please might expect a max.15% figure reduction in finishes other than white