




disc
K51702.04.RF.BK-BK.OP.ST.8.40

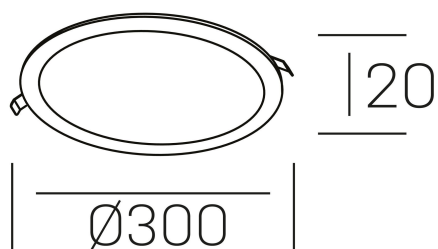

GENERAL DETAILS

INSTALLATION	recessed with frame, recessed with frame
COLOR EXT-INT	Black-Black
LIGHT DIRECTION	Fixed
INT/EXT IP DEGREE	IP 43
MATERIAL	Aluminio
IK DEGREE	IK03
UTILIZATION	Indoor
WARRANTY	3 años

ELECTRICAL DETAILS

LAMP	LED
POWER	24 W
COLOUR TEMPERATURE	4000K
ANALYSIS LUMINAIRE LUMINOUS FLU	2350 Lm
ANALYSIS EFFICIENCY	100 Lm/W
DIMABLE	No Dim
DRIVER	Remoto
ELECTRICAL INSULATION CLASS II	
COLOUR RENDERING INDEX	CRI >80
VOLTAGE	220-240 V
FRECUENCIA	50-60 Hz
CURRENT INTENSITY	600 mA
LIFE TIME	35.000 h

GENERAL DIMENSIONS

DIMENSION	Ø 300 mm
CUT OUT	Ø 280 mm
HEIGHT	h 20mm
DISTANCIA MIN FALSO TECHO	20 mm
DIMENSIONES DE EMBALAJE	305 × 346 × 45 mm
PESO NETO	0.66

*Please might expect a max.15% figure reduction in finishes other than white