




eryl
K51000.03.SR.BK-BK.36.ST.8.30

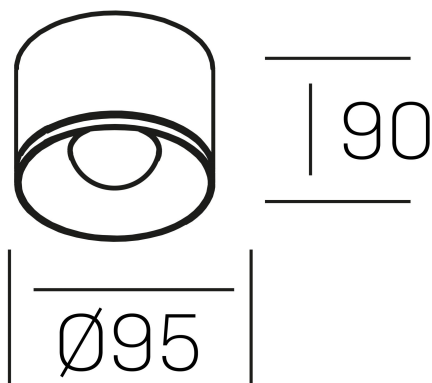

GENERAL DETAILS

INSTALLATION	Surface
COLOR EXT-INT	Black-Black
LIGHT DIRECTION	Fixed
BEAM ANGLE	36°
INT/EXT IP DEGREE	IP20
MATERIAL	Aluminio
IK DEGREE	IK 6
UTILIZATION	Indoor
WARRANTY	3 años

ELECTRICAL DETAILS

LAMP	LED
POWER	20 W
COLOUR TEMPERATURE	3000K
ANALYSIS LUMINAIRE LUMINOUS FLU	1430 Lm
ANALYSIS EFFICIENCY	72 Lm/W
DIMABLE	No Dim
DRIVER	Integrado
ELECTRICAL INSULATION CLASS	II
COLOUR RENDERING INDEX	CRI >80
VOLTAGE	220-240 V
FRECUENCIA	50-60 Hz
LIFE TIME	35.000 h

GENERAL DIMENSIONS

DIMENSION	Ø 95 mm
HEIGHT	h 70 mm
DIMENSIONES DE EMBALAJE	100 × 100 × 73 mm

*Please might expect a max.15% figure reduction in finishes other than white