




**fame**  
K51500.02.TK.BK-BK.38.ST.8.30

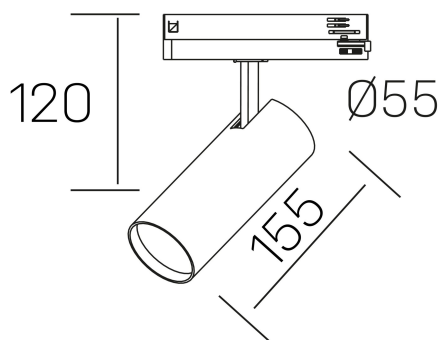

## GENERAL DETAILS

|                   |             |
|-------------------|-------------|
| INSTALLATION      | Tracklight  |
| COLOR EXT-INT     | Black-Black |
| LIGHT DIRECTION   | Orientable  |
| BEAM ANGLE        | 38°         |
| INT/EXT IP DEGREE | IP20        |
| MATERIAL          | Aluminio    |
| TILTING DEGREES   | 90°         |
| IK DEGREE         | IK02        |
| UTILIZATION       | Indoor      |
| WARRANTY          | 3 años      |
| ROTATION DEGREES  | 360°        |

## ELECTRICAL DETAILS

|                                 |           |
|---------------------------------|-----------|
| LAMP                            | LED       |
| POWER                           | 20 W      |
| COLOUR TEMPERATURE              | 3000K     |
| ANALYSIS LUMINAIRE LUMINOUS FLU | 1710 Lm   |
| ANALYSIS EFFICIENCY             | 85 Lm/W   |
| DIMABLE                         | No Dim    |
| DRIVER                          | Integrado |
| ELECTRICAL INSULATION CLASS     | II        |
| COLOUR RENDERING INDEX          | CRI >80   |
| VOLTAGE                         | 220-240 V |
| FRECUENCIA                      | 50-60 Hz  |
| CURRENT INTENSITY               | 500 mA    |
| LIFE TIME                       | 35.000 h  |

## GENERAL DIMENSIONS

|                         |                   |
|-------------------------|-------------------|
| DIMENSION               | 155 x Ø 75 mm     |
| HEIGHT                  | h 95 mm, h 120 mm |
| DIMENSIONES DE EMBALAJE | 205 x 225 x 95 mm |
| PESO NETO               | 0.38              |

\*Please might expect a max.15% figure reduction in finishes other than white