

LED Switching Power Supply

- Screw terminal installation, simple and reliable.;
- High power density, small size, high only 20mm, saving installation space;
- 100% full load burn-in test,
- Suitable for internal lights application for I / II / III.
- Equipped with over temperature, over current protection, short circuit protection, UVP, OVP
- Widely used in LED lighting and IT equipment
- Compliance to worldwide safety regulation for led lightings.




SELV




Specification

Model		NANO-12-36	NANO-24-36	NANO-36-36	NANO-48-36
OUTPUT	Output voltage	12VDC	24VDC	36VDC	48VDC
	Output voltage range	12VDC±0.5VDC	24VDC±0.5VDC	36VDC±0.5VDC	48VDC±0.5VDC
	Output current	Max 3A	Max 1.5A	Max 1A	Max 0.75A
	Output power	Max 36W			
	Output power range	0~36W			
	Linear Regulation	±1%			
	Load Regulation	±1%			
	Start-up Time (Typ)	100ms/230Vac 100ms/110Vac			
	Hold Up Time(Typ)	20ms/230Vac 12ms/110Vac			
INPUT	Input voltage	100-240Vac			
	Frequency	50Hz/60Hz			
	Input current	0.318A/230Vac 0.595A/110Vac			
	Power factor	PF>0.55			
	No-load power consumption	< 0.075W			
	Efficiency (typ.)	85%	86%	88%	88%
	Inrush current(typ.)	Cold start 50A at 230Vac			
	Control surge capability	L,N:1KV L,N-PE:2KV			
Leakage current	Max. 0.5mA				
ENVIRONMENT	Working temperature	ta: -30°C~ 50°C tc: 80°C			
	Working humidity	20 ~ 99%RH, non-condensing			
	Storage temp., humidity	-40°C ~ 80°C, 10~95%RH			
PROTECTION	Overtemperature	Protection type: Turn off the output voltage, after the temperature drops, re-energize to restore.			
	Over load protection	Shut down the output when current load ≥110%~150%, auto recovers.			
	Short circuit protection	Protection type: It can be automatically restored after the fault is eliminated.			
SAFETY & EMC	Withstand voltage	I/P-O/P:2000Vac			
	Isolation resistance	I/P-O/P: 100MΩ/500VDC/25°C/70%RH			
	EMC Test Standards	EN55015: 2013;EN61547: 2009; EN61000-3-2:2014; EN61000-3-3:2013			
Reliability and Quality Control	Impact aging	100% of the product is fully loaded and impacted for 4 hours under an environment of at least 40°C ± 5°C			
	Component derating	Under the steady-state conditions of rated input and output, the stress of components will not exceed its maximum nominal value			
NOTE	1. All parameters not specifically mentioned are measured at 230VAC input, rated load and 25°C ambient temperature. 2. Ensure that the power supply is used under the rated parameters and environment.				


Dimensions
Unit:mm

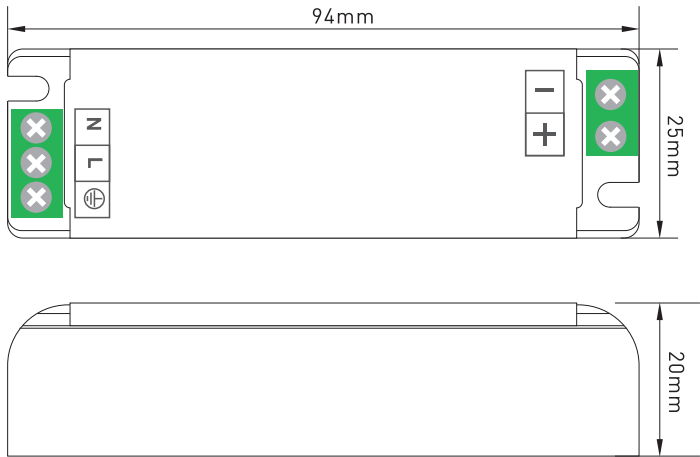


Relationship diagrams

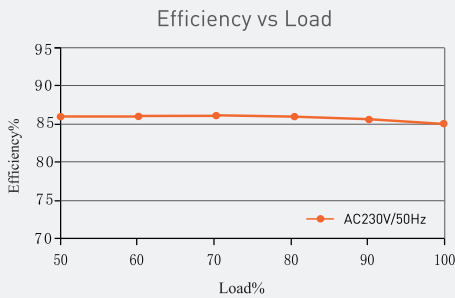


NANO-12-36

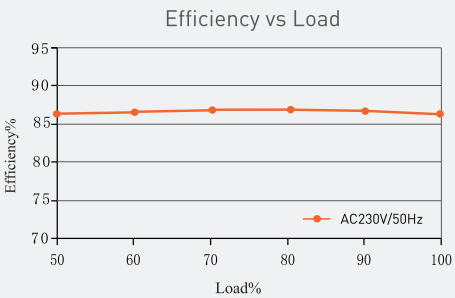

NANO-24-36

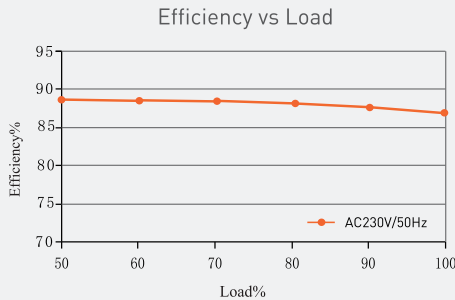

NANO-36-36

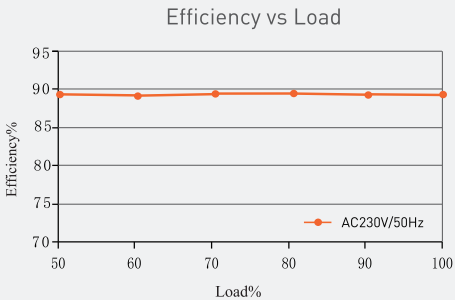


NANO-48-36

Packaging Information

DIMENSION	94x25x20mm(LxWxH)
PACKING	mm(LxWxH)
CARTON QUANTITY	PCS
CARTON SIZE	mm(LxWxH)
WEIGHT	g±10g/PCS

Temperature load curve

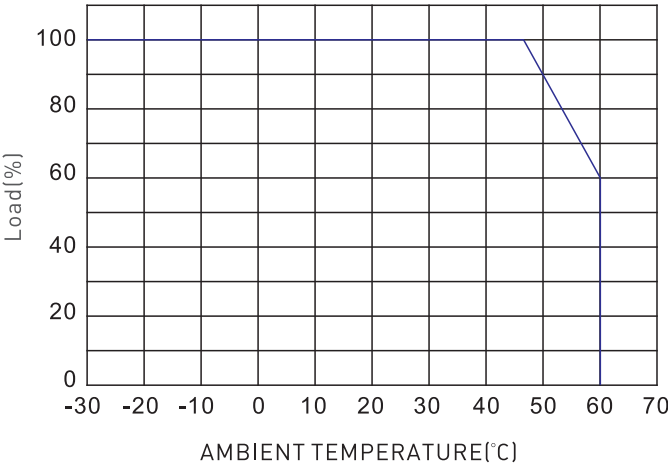

* No further notice if any changes in the manual. Product function depends on the goods. Please feel free to contact your supplier if any question.