





BLADE




# BLADE

BLADE	#	W	K	lm	☺
	5131334	2x6	3000	2x250	-
	5131334D	2x6	3000	2x250	DALI/PUSH



## Adjustable light beam up to 100°

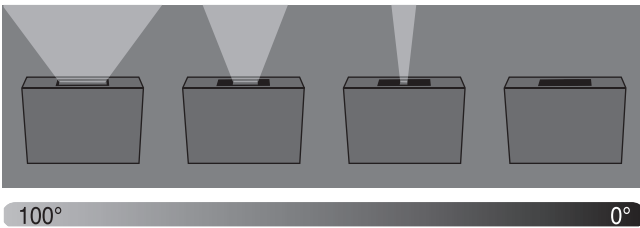

Adjustable light beam angles, separately up and down from 0° to 100°.  
 Die Möglichkeit, die Abstrahlwinkel getrennt von 0° bis 100° nach oben und unten einzustellen.  
 Angles de faisceau lumineux réglables, séparément de haut en bas de 0° à 100°.  
 Angoli del fascio luminoso regolabili, separatamente su e giù da 0° a 100°.  
 Állítható fénysugár szög, külön felfelé és lefelé 0° és 100° között.  
 Možnost nastavení úhlu vyzařování samostatně směrem nahoru i dolů od 0° do 100°.  
 Možnosť nastavenia uhlov vyžarovania samostatne smerom hore aj dole od 0° do 100°.

