# HLG-240H series





#### Features:

- Universal AC input / Full range (up to 305VAC)
- · Built-in active PFC function
- Protections: Short circuit / Over current / Over voltage / Over temperature
- · Cooling by free air convection
- · OCP point adjustable through output cable or internal potentiometer
- IP67 / IP65 design for indoor or outdoor installations
- Three in one dimming function (1~10Vdc or PWM signal or resistance)
- Suitable for LED lighting and street lighting applications
- · Compliance to worldwide safety regulations for lighting
- Suitable for dry / damp / wet locations
- 5 years warranty (Note.10)















HLG-240H-12 A Blank: IP67 rated. Cable for I/O connection.

- A: IP65 rated. Output voltage and constant current level can be adjusted through internal potentiometer.
- B: IP67 rated. Constant current level adjustable through output cable with 1~10Vdc or 10V PWM signal or resistance.
- C: Terminal block for I/O connection. Output voltage and constant current level can be adjusted through internal potentiometer.

D (option): IP67 rated. Timer dimming function, contact MEAN WELL for details.

#### **SPECIFICATION**

| MODEL       |                                | HLG-240H-12  | HLG-240H-15    | HLG-240H-20       | HLG-240H-24     | HLG-240H-30      | HLG-240H-36      | HLG-240H-42      | HLG-240H-48   | HLG-240H-54  |  |  |
|-------------|--------------------------------|--|----------------|-------------------|-----------------|------------------|------------------|------------------|---------------|--------------|--|--|
|             | DC VOLTAGE                     | 12V  | 15V            | 20V               | 24V             | 30V              | 36V              | 42V              | 48V           | 54V          |  |  |
|             | CONSTANT CURRENT REGION Note.4 | 6~12V  | 7.5 ~ 15V      | 10 ~ 20V          | 12 ~ 24V        | 15 ~ 30V         | 18 ~ 36V         | 21 ~ 42V         | 24 ~ 48V      | 27 ~ 54V     |  |  |
|             | RATED CURRENT                  | 16A  | 15A            | 12A               | 10A             | 8A               | 6.7A             | 5.72A            | 5A            | 4.45A        |  |  |
|             | RATED POWER                    | 192W   | 225W           | 240W              | 240W            | 240W             | 241.2W           | 240.24W          | 240W          | 240.3W       |  |  |
|             | RIPPLE & NOISE (max.) Note.2   | 150mVp-p   | 150mVp-p       | 150mVp-p          | 150mVp-p        | 200mVp-p         | 250mVp-p         | 250mVp-p         | 250mVp-p      | 350mVp-p     |  |  |
|             | VOLTAGE ADJ. RANGE Note.6      |  | 14 ~ 16V       |                   | 22.4 ~ 25.6V    |                  | 33.5 ~ 38.5V     | 39 ~ 45V         | 44.8 ~ 51.2V  |              |  |  |
| OUTPUT      |                                |  | ed by internal | potentiometer A   |                 |                  |                  |                  |               |              |  |  |
|             | CURRENT ADJ. RANGE             | 8 ~ 16A  | 7.5 ~ 15A      | 6 ~ 12A           | 5 ~ 10A         | 4 ~ 8A           | 3.3 ~ 6.7A       | 2.86 ~ 5.72A     | 2.5 ~ 5A      | 2.23 ~ 4.45A |  |  |
|             | VOLTAGE TOLERANCE Note.3       | ±2.5%  | ±2.0%          | ±1.0%             | ±1.0%           | ±1.0%            | ±1.0%            | ±1.0%            | ±1.0%         | ±1.0%        |  |  |
|             | LINE REGULATION                | ±0.5%  | ±0.5%          | ±0.5%             | ±0.5%           | ±0.5%            | ±0.5%            | ±0.5%            | ±0.5%         | ±0.5%        |  |  |
|             | LOAD REGULATION Note.8         | ±2.0%  | ±1.5%          | ±1.0%             | ±0.5%           | ±0.5%            | ±0.5%            | ±0.5%            | ±0.5%         | ±0.5%        |  |  |
|             | SETUP, RISE TIME Note.9        | 2500ms, 80m  | s at full load | 230VAC /115V      | AC              | I.               | ı                |                  |               |              |  |  |
|             | HOLD UP TIME (Typ.)            | 15ms at full lo  | ad 230VAC      | /115VAC           |                 |                  |                  |                  |               |              |  |  |
|             | VOLTAGE RANGE Note.5           | 90 ~ 305VAC  | 127 ~ 43       | 1VDC              |                 |                  |                  |                  |               |              |  |  |
|             | FREQUENCY RANGE                | 47 ~ 63Hz  |                |                   |                 |                  |                  |                  |               |              |  |  |
| INPUT       | POWER FACTOR (Typ.)            | PF>0.98/115\   | /AC, PF>0.95/2 | 230VAC at full I  | oad (Please re  | fer to "Power F  | actor Characte   | eristic" curve)  |               |              |  |  |
|             | EFFICIENCY (Typ.)              | 90%  | 90%            | 92%               | 93%             | 93%              | 93%              | 93%              | 93.5%         | 94%          |  |  |
|             | AC CURRENT (Typ.)              | 4A / 115VAC 2A / 230VAC 1.2A / 277VAC  |                |                   |                 |                  |                  |                  |               |              |  |  |
|             | INRUSH CURRENT (Typ.)          | COLD START 75A/230VAC  |                |                   |                 |                  |                  |                  |               |              |  |  |
|             | LEAKAGE CURRENT                | <0.75mA / 277VAC   |                |                   |                 |                  |                  |                  |               |              |  |  |
|             | OVER CURRENT Note.4            | 95 ~ 108%  |                |                   |                 |                  |                  |                  |               |              |  |  |
|             |                                | Protection type : Constant current limiting, recovers automatically after fault condition is removed   |                |                   |                 |                  |                  |                  |               |              |  |  |
|             | SHORT CIRCUIT                  |  |                | matically after   |                 |                  |                  |                  |               |              |  |  |
| PROTECTION  |                                | 13.5 ~ 18V   | 17.5 ~ 21.5V   | 23.5 ~ 27.5V      | 27 ~ 34V        | 33 ~ 39V         | 43 ~ 49V         | 48 ~ 54V         | 55 ~ 63V      | 60 ~ 67V     |  |  |
|             | OVER VOLTAGE                   | Protection typ   | e : Shut down  | and latch off o/  | p voltage, re-p | ower on to reco  | ver              |                  |               |              |  |  |
|             |                                | 105°C ±5°C (TSW1) 95°C ±5°C (TSW1)   |                |                   |                 |                  |                  |                  |               |              |  |  |
|             | OVER TEMPERATURE               | Protection type: Shut down o/p voltage, recovers automatically after temperature goes down   |                |                   |                 |                  |                  |                  |               |              |  |  |
|             | WORKING TEMP.                  |  | Refer to "Dera |                   |                 |                  |                  |                  |               |              |  |  |
|             | WORKING HUMIDITY               | 20 ~ 95% RH non-condensing   |                |                   |                 |                  |                  |                  |               |              |  |  |
| ENVIRONMENT | STORAGE TEMP., HUMIDITY        | -40 ~ +80°C, 10 ~ 95% RH   |                |                   |                 |                  |                  |                  |               |              |  |  |
|             | TEMP. COEFFICIENT              | ±0.03%/°C (0 ~ 50°C)   |                |                   |                 |                  |                  |                  |               |              |  |  |
|             | VIBRATION                      | 10 ~ 500Hz, 5  | G 12min./1cyd  | cle, period for 7 | 72min. each ald | ong X, Y, Z axes | S                |                  |               |              |  |  |
|             |                                | UL1012, CAN  | I/CSA-C22.2    | No. 107.1-01,     | UL8750, CSA     | C22.2 No. 250    | .0-08, TUV EN    | 61347-1, EN6     | 1347-2-13 ind | ependent     |  |  |
|             | SAFETY STANDARDS Note.7        | UL1012, CAN/CSA-C22.2 No. 107.1-01, UL8750, CSA C22.2 No. 250.0-08, TUV EN61347-1, EN61347-2-13 independent (except for HLG-240H C type), UL60950-1, UL8750, TUV EN60950-1, IP65 or IP67, J61347-1, J61347-2-13 approved |                |                   |                 |                  |                  |                  |               |              |  |  |
| SAFETY &    | WITHSTAND VOLTAGE              | I/P-O/P:3.75   | KVAC I/P-F     | G:1.88KVAC        | O/P-FG:0.5K     | VAC              |                  |                  |               |              |  |  |
| EMC         | ISOLATION RESISTANCE           | I/P-O/P, I/P-F   | G, O/P-FG:10   | 00M Ohms / 50     | 0VDC / 25°C /   | 70% RH           |                  |                  |               |              |  |  |
|             | EMC EMISSION                   | Compliance to  | EN55015, EN    | N55022 (CISPF     | R22) Class B, E | N61000-3-2 C     | lass C (≥50%     | load) ; EN610    | 00-3-3        |              |  |  |
|             | EMC IMMUNITY                   | Compliance to  | EN61000-4-2    | 2,3,4,5,6,8,11, 1 | EN61547, EN5    | 5024, light indu | ıstry level (sur | ge 4KV), criteri | ia A          |              |  |  |
|             | MTBF                           | 207.9K hrs m   | n. MIL-HDE     | 3K-217F (25°C)    | )               |                  |                  |                  |               |              |  |  |
| OTHERS      | DIMENSION                      | 244.2*68*38.   | 8mm (L*W*H)(   | HLG-240H-Bla      | nk/A/B) 2       | 51*68*38.8mm     | (L*W*H)(HLG      | -240H-C)         |               |              |  |  |
|             | PACKING                        | 1.3Kg; 12pcs/  | 16.6Kg/0.84C   | UFT(HLG-240-      | Blank/A/B)      | 1.23Kg; 12pc     | cs/15.8Kg/1.16   | CUFT(HLG-24      | 0-C)          |              |  |  |
|             | 1. All parameters NOT special  | lv mentioned a   | re measured    | at 230VAC inp     | ut. rated load  | and 25°C of ar   | mbient tempera   | ature.           |               |              |  |  |

#### NOTE


- All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.
- 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.

  3. Tolerance: includes set up tolerance, line regulation and load regulation.
- 4. Constant current operation region is within 50% ~100% rated output voltage. This is the suitable operation region for LED related applications, but please reconfirm special electrical requirements for some specific system design.

  5. Derating may be needed under low input voltages. Please check the static characteristics for more details.
- 6. Type A and type C only.
- 7. Safety and EMC design refer to EN60598-1, subject 8750(UL), CNS15233, GB7000.1, FCC part18.
- 8. Length of set up time is measured at cold first start. Turning ON/OFF the power supply may lead to increase of the set up time.
- 9. The power supply is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.


10. Refer to warranty statement.



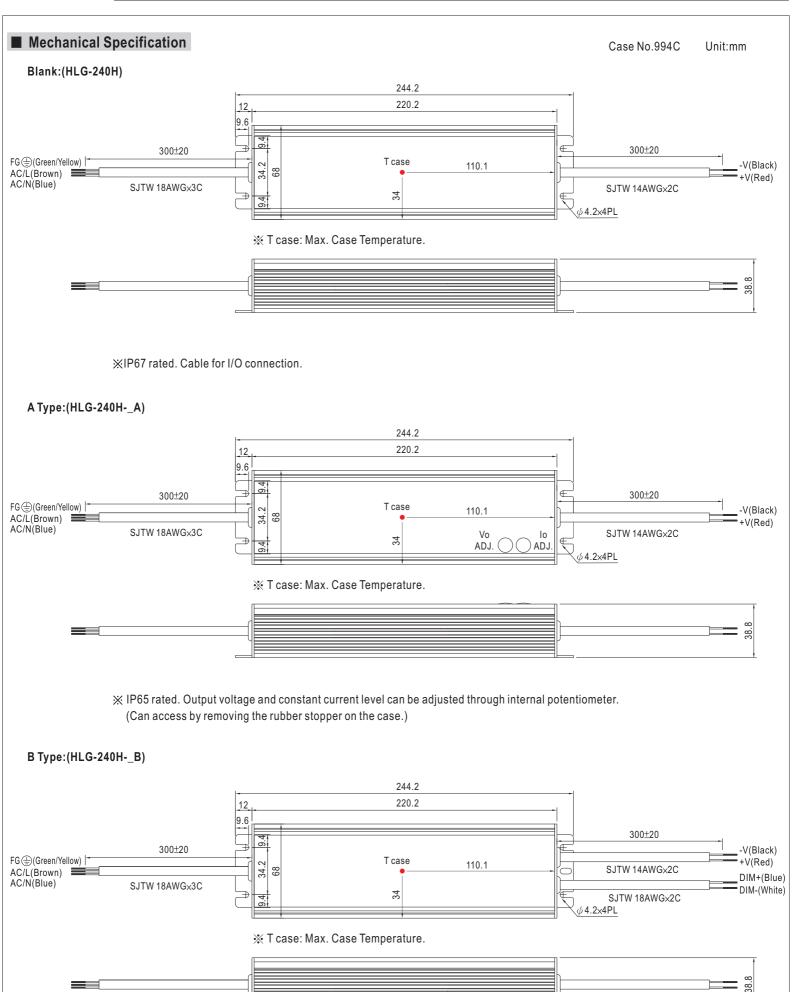





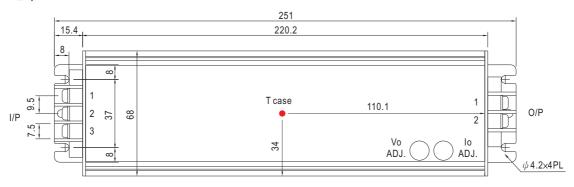

※ T case: Max. Case Temperature.



X Output voltage and constant current level can be adjusted through internal potentiometer. (Can access by removing the rubber stopper on the case.)


AC Input Terminal Pin No. Assignment

| Pin No. | Assignment |
|---------|------------|
| 1       | FG ±       |
| 2       | AC/L       |
| 3       | AC/N       |


### DC Output Terminal Pin No. Assignment

| Pin No. | Assignment |
|---------|------------|
| 1       | -V         |
| 2       | +V         |


### D Type(option):(HLG-240H-\_D)

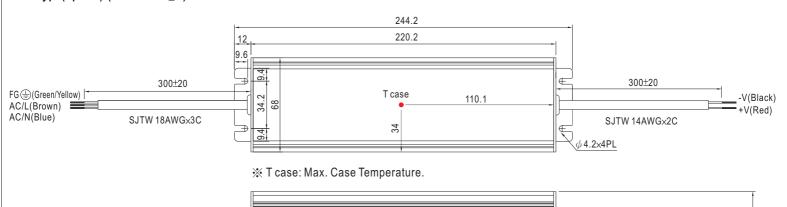




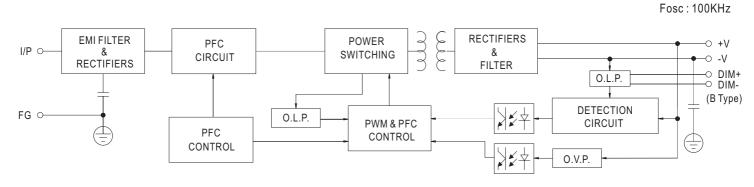



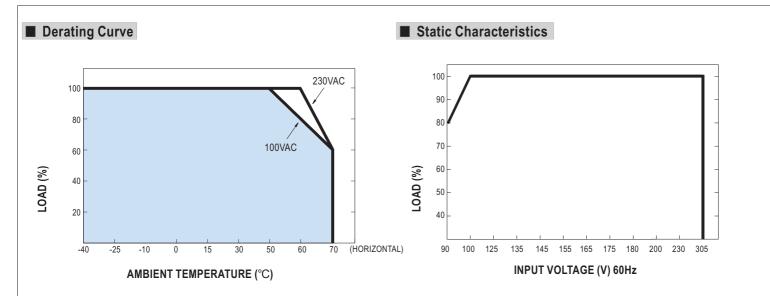


# **■** Power Factor Characteristic

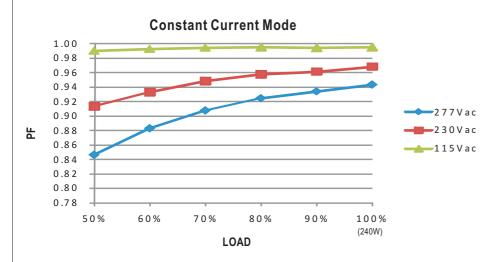

## ■ EFFICIENCY vs LOAD (48V Model)

HLG-240H series possess superior working efficiency that up to 93.5% can be reached in field applications.

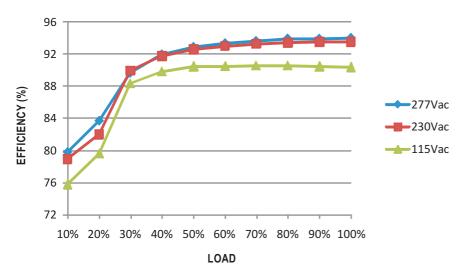




## ■ DRIVING METHODS OF LED MODULE

There are two major kinds of LED drive method "direct drive" and "with LED driver".

A typical LED power supply may either work in "constant voltage mode (CV) or constant current mode (CC)" to drive the LEDs.

Mean Well's LED power supply with CV+ CC characteristic can be operated at both CV mode (with LED driver, at area (A) and CC mode (direct drive, at area (B).

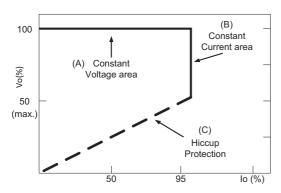

Typical LED power supply I-V curve

## ■ DIMMING OPERATION (for B-type only)



- ※ Please DO NOT connect "DIM-" to "-V".
- X Reference resistance value for output current adjustment (Typical)

| Resistance value            | Single driver    | 10K $\Omega$ | <b>20K</b> Ω | $30$ K $\Omega$ | $40$ K $\Omega$ | 50K $Ω$ | <b>60K</b> Ω | <b>70K</b> Ω | <b>80K</b> Ω | <b>90K</b> Ω | 100K $\Omega$ | OPEN     |
|-----------------------------|------------------|--------------|--------------|-----------------|-----------------|---------|--------------|--------------|--------------|--------------|---------------|----------|
|                             | Multiple drivers | 10KΩ/N       | 20KΩ/N       | 30KΩ/N          | 40KΩ/N          | 50KΩ/N  | 60KΩ/N       | 70KΩ/N       | 80KΩ/N       | 90KΩ/N       | 100KΩ/N       |          |
| Percentage of rated current |                  | 10%          | 20%          | 30%             | 40%             | 50%     | 60%          | 70%          | 80%          | 90%          | 100%          | 95%~108% |

## 

| Dimming value               | 1V  | 2V  | 3V  | 4V  | 5V  | 6V  | 7V  | 8V  | 9V  | 10V  | OPEN     |
|-----------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|----------|
| Percentage of rated current | 10% | 20% | 30% | 40% | 50% | 60% | 70% | 80% | 90% | 100% | 95%~108% |


#### ※ 10V PWM signal for output current adjustment (Typical): Frequency range: 100Hz ~ 3KHz

| Duty value                  | 10% | 20% | 30% | 40% | 50% | 60% | 70% | 80% | 90% | 100% | OPEN     |
|-----------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|----------|
| Percentage of rated current | 10% | 20% | 30% | 40% | 50% | 60% | 70% | 80% | 90% | 100% | 95%~108% |

XUsing the built-in dimming function on B-type model can't turn the lighting fixture totally dark. Please refer to the connection method below to achieve 0% brightness of the lighting fixture connecting to the LED power supply unit.

\*Direct connecting to LEDs is suggested, but is not suitable for using additional drivers.

Dimming connection diagram for turning the lighting fixture  $\mbox{ON/OFF}$ :

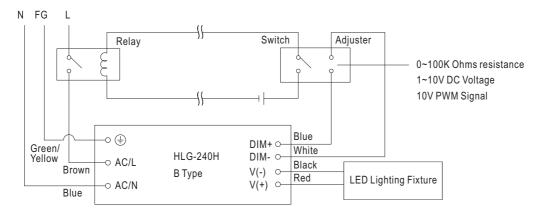

Using a switch and relay can turn ON/OFF the lighting fixture.


- $1. Output \ constant \ current \ level \ can \ be \ adjusted \ through \ output \ cable \ by \ connecting \ a \ resistance \ or \ 1 \sim 10 \ Vdc \ or \ 10 \ VPWM \ signal \ between \ DIM+ \ and \ DIM-.$
- 2. The LED lighting fixture can be turned ON/OFF by the switch.




## ■ WATERPROOF CONNECTION

### Waterproof connector

Waterproof connector can be assembled on the output cable of HLG-240H to operate in dry/wet/damp or outdoor environment.

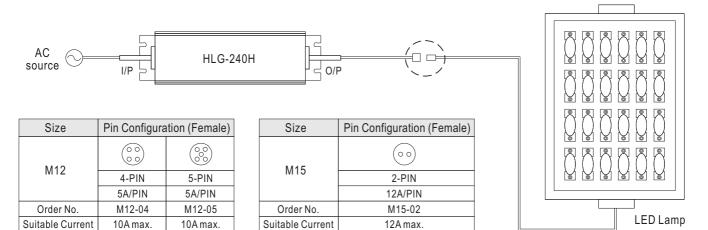

#### O Cable Joiner

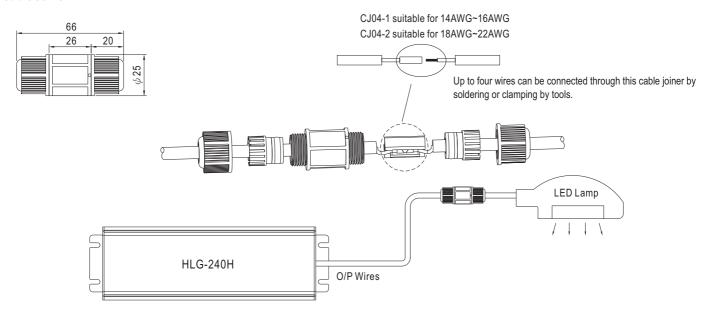

\*\*CJ04 cable joiner can be purchased independently for user's own assembly. MEAN WELL order No.: CJ04-1, CJ04-2.

