
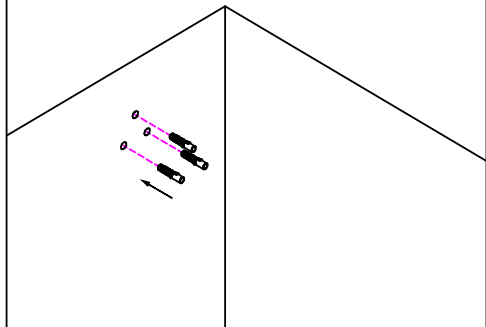
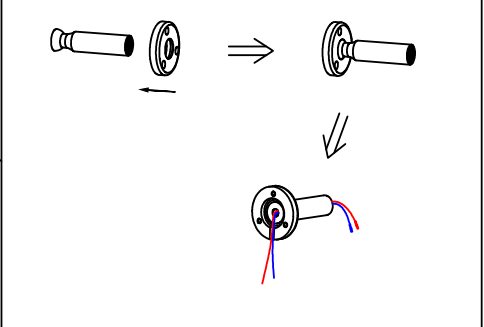
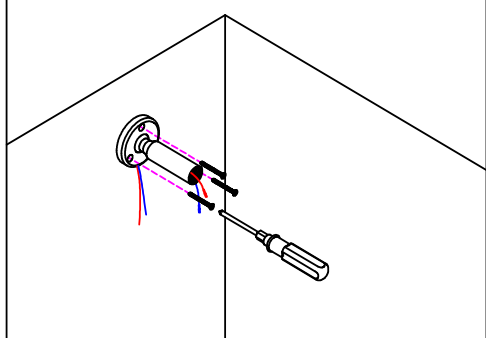
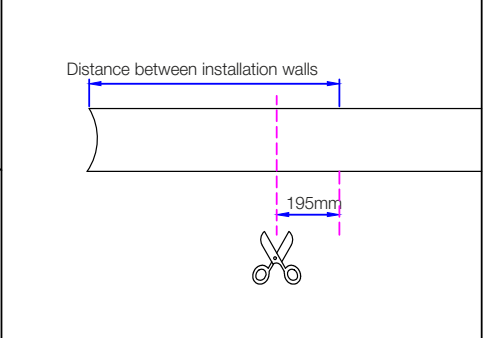
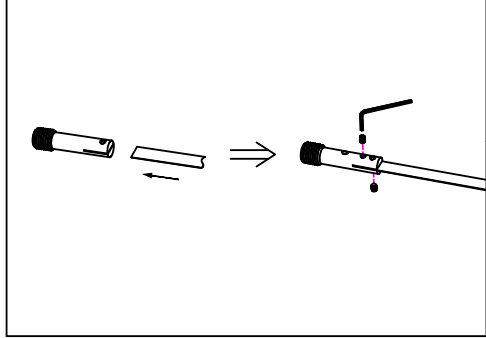


SkyLine

S40140
S40141

SLC
Developed by
The Light Group

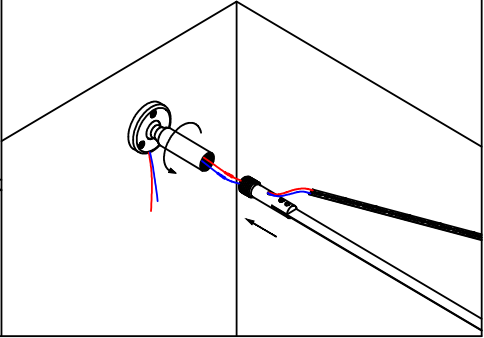

<p>Step 1 Locate mark the mounting position of the base. Use an electric drill to drill holes in the marked position on the wall, and then drive in the expansion rubber plug.</p> 	<p>Step 2 Push the base into the round sleeve, and then insert the power cable from one end of the base to one end of the round sleeve.</p> 
<p>Step 3 Align the base of the power cord and the round sleeve with the expansion rubber plug, insert the screw, and tighten the screw with a screwdriver.</p> 	<p>Step 4 Cut the steel strip according to the distance from the wall, the cutting length of steel strip is 195mm shorter than the actual wall.</p> 
<p>Step 5 Push the steel strip into the fixing part and tighten the screw with an allen key.</p> 	<p>Step 6 Connect the wires, push in the steel belt fastener, and rotate the round sleeve to straighten the steel belt.</p> 



NO: Må installeres av godkjent installator
EN: Only to be installed by an authorized electrician
DE: Nur von einer autorisierten Elektrofachkraft installieren lassen
FI: Asenna vain valtuutettu sähköasentaja
FR: Seulement pour être installé par un électricien autorisé
IS: Aðeins skal setja upp af viðurkenndum rafvirkni
ES: Solo para ser instalado por un electricista autorizado.
IT: Solo per essere installato da un elettricista autorizzato




NO: Slå av strømmen før montering
EN: Power off before installing
DE: Schalten Sie vor der Installation die Stromversorgung aus
FI: Katkaise virta ennen asennusta
FR: Couper le courant avant d'installer
IS: Slökktu á orku áður en þú setur upp
ES: Apague la alimentación antes de instalar
IT: Spegnerne l'alimentazione prima di installare



Management, Operation
and Maintenance

Step 7

The LED-strip is neatly pasted on the steel strip, and the LED-strip can be cut freely at the joint. At this point, complete the installation of one side of the cable terminal, and repeat the same steps to complete the installation of the other wireless terminal.

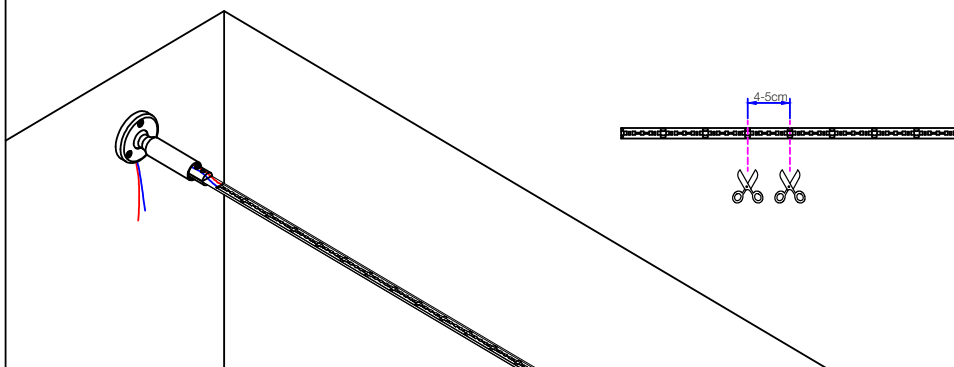

Step 8

Refer to the previous steps, install the power supply to the appropriate position on the wall, connect the power input end with the power supply line, and connect the output end with the base power line, and finally complete the installation.

